
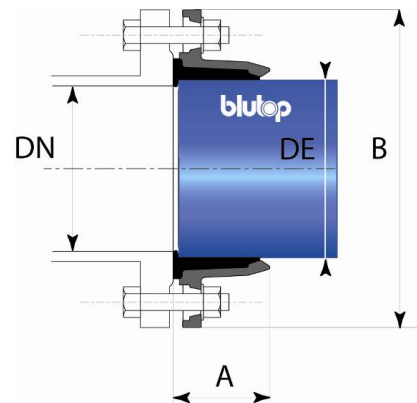




QUICK PVC et BLUTOP non verrouillé

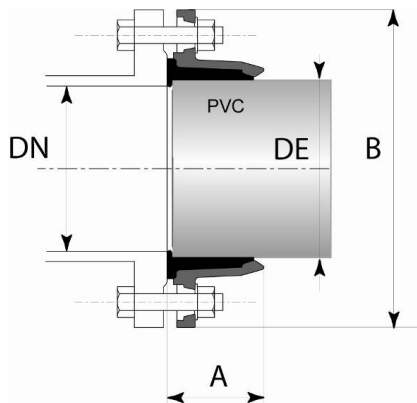

DN	Ø DE	A	B	Masse	Référence
mm	mm	mm	mm	kg	
40	40	50	150	1,2	MAL40DACH
40-50	50	53	165	1,5	MAL50DACH
50	63	54	165	1,8	MAL60DACH
60-65	63	54	185	2,0	MAL65DACH
60-65	75	58	185	2,3	MAL75DACH
80	90	62	200	2,6	MAL90DACH
100	110	68	220	3,1	160754
125	125	73	250	4,1	160755
125	140	76	250	4,1	160756
150	160	82	285	5,2	160757
200	200	91	340	7,5	160758
200	225	93	340	7,1	160759

**Note :** Gamme BLUTOP pour DN75, 90, 110, 125 et 160

## Matériaux et revêtements

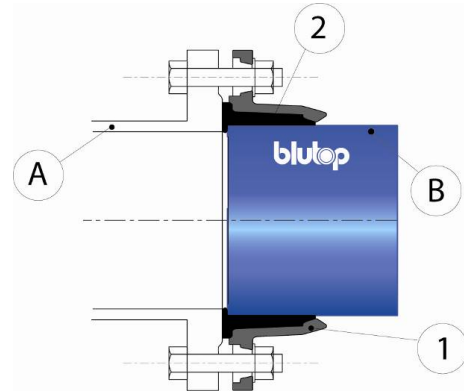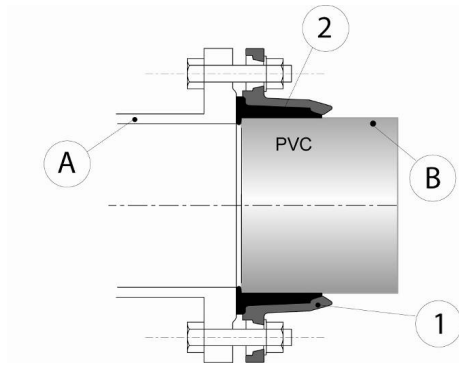

Repère	Désignation	Matière	Revêtement
1	Contrebride	Fonte GS	Poudrage Epoxy Epaisseur mini 250 microns
2	Garniture d'étanchéité	EPDM	
A	Vanne	Fonte GS	
B	Tuyau	PVC ou Fonte (BLUTOP)	

## Marquage

