




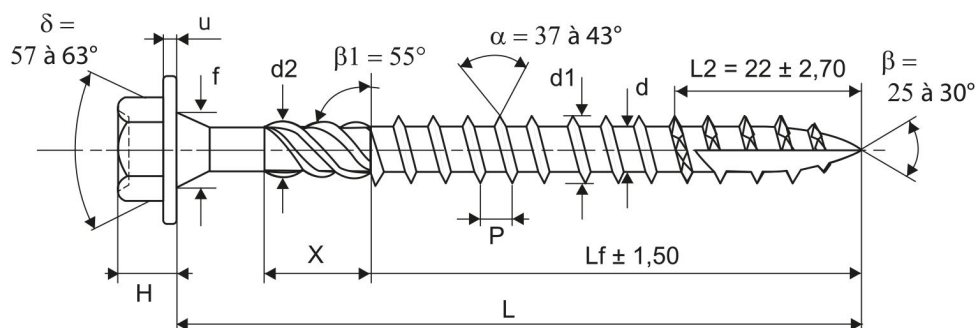

Tête hexagonale

TIREFOND Acier bichromaté

TH



Valeurs fraise
pour les longueurs
supérieures
à 80 mm

Caractéristiques

	Ø 6	Ø 8	Ø 10
N° clé	N°8	N°10	N°13
Dk	12,50/13,50	16,50/17,50	19,00/20,00
A	7,78/8,00	9,78/10,00	12,73/13,00
W	8,71 mini	10,95 mini	14,26 mini
H	4,50/5,00	6,00/6,50	7,00/7,50
f	6,10/6,30	7,80/8,10	9,50/10,00
u	0,90/1,20	1,00/1,30	1,50/1,80
P	2,60 ± 10%	3,80 ± 10%	4,50 ± 10%
d	3,50/3,80	5,10/5,40	6,20/6,50
d1	5,70/6,00	7,70/8,00	9,65/10,00
X	11,00/13,00	11,00/13,00	11,00/13,00
d2	4,80/5,20	6,80/7,20	8,80/9,20
Couple de rupture mini	11,00 Nm	25,00 Nm	44,00 Nm

Tous Ø L = 40/50	50/80	100/120	140/160
Tolérance 0/- 1,25	0/- 1,50	0/- 1,75	0/- 1,50

CE
EN 14592+A1
2012

VYNEX - 22 Grande Rue - 08350 THELONNE
Tél : 03 24 54 59 56 - Fax : 03 24 54 59 77