


FICHE TECHNIQUE

MANILLES DROITE PITON A ŒIL - GAMME STANDARD

Acier zingué

Norme CE

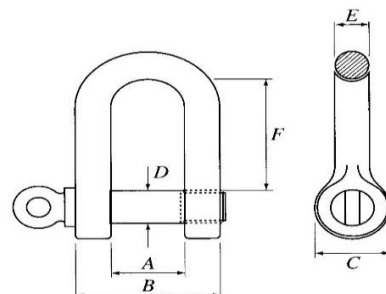

Dimensions : tolérance $\pm 0,2$ mm

CODE	CODE EAN	X PIECE VRAC GENCODE	X PIECE SACHET VRAC	X PIECE BLISTER	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	CHARGE DE TRAVAIL INDICATIVE (EN KG)
330G5Z	3233690237495	1			9	18	10	M5	5	20	70
MD00	3233690027706			1	9	18	10	M5	5	20	70
330G6Z	3233690237501	1			11	23	11	M6	6	24	100
330/6Z	3233690005278		10		11	23	11	M6	6	24	100
MD1	3233690027713			1	11	23	11	M6	6	24	100
330G/8Z	3233690205418	1			16	31	15	M8	8	32	250
330/8Z	3233690005285		10		16	31	15	M8	8	32	250
MD2	3233690027720			1	16	31	15	M8	8	32	250
330G/10Z	3233690205425	1			18	38	19	M10	10	38	400
330/10Z	3233690005209		10		18	38	19	M10	10	38	400
MD3	3233690027737			1	18	38	19	M10	10	38	400
330/12Z	3233690005216	1			26	48	21	M12	12	46	630
330/12Z10	3233690273257				26	48	21	M12	12	46	630
330/14Z	3233690005223	1			27	54	26	M14	14	56	750
330/14Z10	3233690273264		10		27	54	26	M14	14	56	750
330/16Z	3233690005230	1			32	62	30	M16	16	62	1 000
330/16Z10	3233690273271		10		32	62	30	M16	16	62	1 000
330/18Z	3233690083771	1			32	65	32	M18	18	70	1 300
330/18Z10	3233690273288				32	65	32	M18	18	70	1 300
330/20Z	3233690005254	1			36	74	37	M20	20	73	1 600
330/20Z10	3233690273295		10		36	74	37	M20	20	73	1 600
330/22Z	3233690005261	1			41	81	43	M22	22	76	2 000
330/25Z5	3233690273318		5		50	95	48	M25	25	97	2 500
330/28Z5	3233690273325		5		52	105	51	M28	27	110	3 100
330/32Z5	3233690274896		5		60	117	59	M32	32	120	4 000



Ne pas utiliser comme élément de suspension humaine