
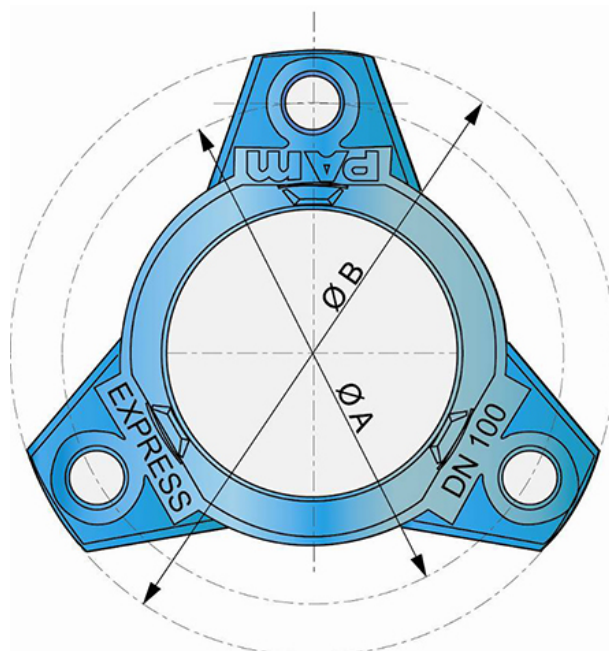


Contre-bride EXP New DN60-150

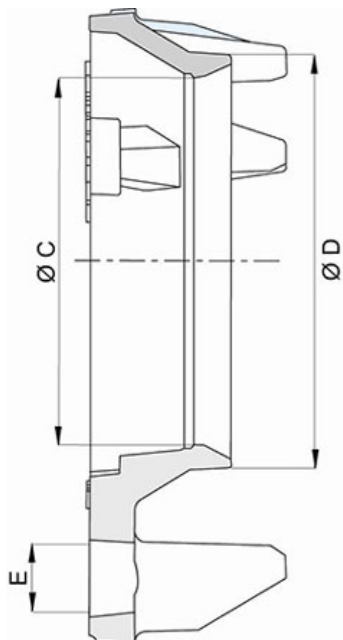

DN	Ø A	Ø B	Ø C	Ø D	E	Masse	Référence
mm	mm	mm	mm	mm	mm	kg	
60	166.0	210.0	80.0	94.5	23.5	1.930	JTA60ANN2
80	190.0	234.5	102.0	116.5	23.5	1.978	JTA80ANN2
100	210.0	254.0	122.0	137.0	23.5	2.280	JTB10ANN2
125	236.0	280.0	148.0	166.5	23.5	3.000	JTB12ANN2
150	264.0	308.0	173.4	192.4	23.5	3.180	JTB15ANN2

Domaine d'emploi :

- Pour réseaux d'adduction d'eau potable

Principales caractéristiques :

- Revêtement de la contrebride : Aquacoat Raccords