




Kenadrain I Channel width 200, class D400

Code : DR202DF

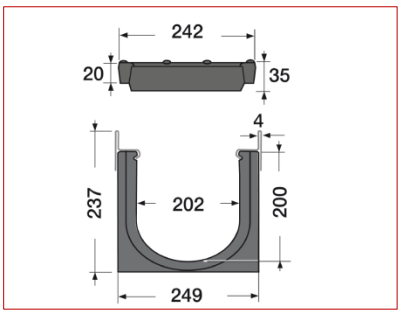

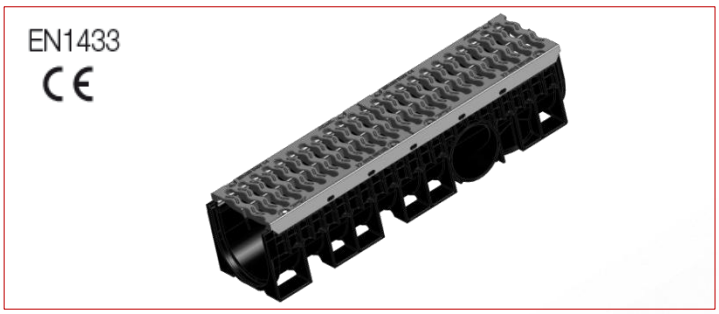

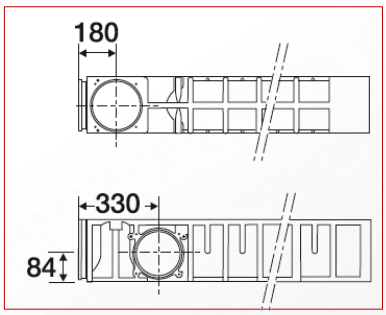

■ FUNCTION :

This product permits to drain run-off water with gratings of length 1000 mm, of class D400 complying with the standard NF-EN 1433, holding the CE marking, assembled via a male/female connection system with locking

■ DESCRIPTION :

It is comprised of:
- a injected recycled polypropylene black body
- two galvanized steel edges.
- two black cast iron gratings class D400
- 4 locking systems with bolt per grating


NZDR202


SZDR20


SBDR20

■ ACCESSORIES :

To connect the channels to the underground network :
- PVC end caps and verticals outlets (Ø160 or Ø200)
- EKSO sump units manufactured also in PVC




■ CHARACTERISTICS :

Resistance class: D400
Effective width: 202 mm
Effective depth: 200 mm
Grating type: Cast iron
Drainage surface: 784 cm²/ml
Hydraulic section: 358.9 cm²
Opening dimensions: 18 / 195 mm
Weight: 27 KG

■ IMPLEMENTATION:

X = 200 mm; L = 650 mm
Z = 200 mm; Y = 205 mm; y = 35 mm

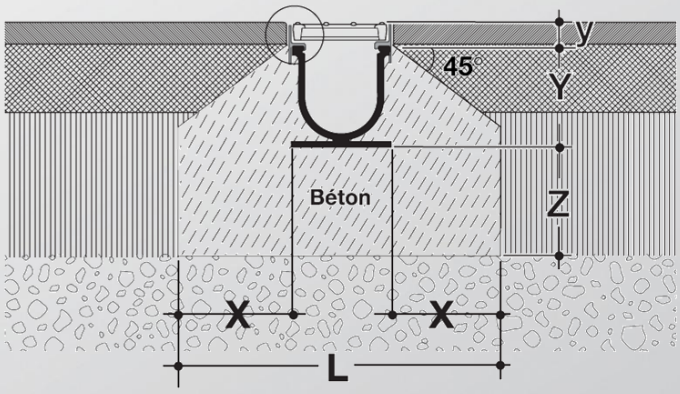

■ QUALITY- ENVIRONMENT :

ISO 9001
ISO 14001
BUREAU VERITAS Certification

DATE: August 2012